


Anzugsbolzen MAS BT

ISO 7388-3 - JF

ehemals MAS BT 403

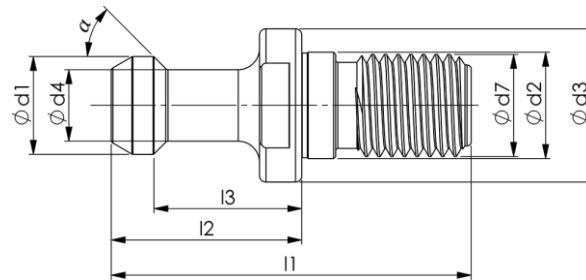


Artikel-Nr.	SK	α	d1	d2	d3	d4	d7	l1	l2	l3
AB-BT1545	15	45°	7	6,5	10,0	4,0	M6	28	17	13,5
AB-BT3045	30	45°	11	12,5	16,5	7,0	M12	43	23	18,0
AB-BT3060	30	60°	11	12,5	16,5	7,0	M12	43	23	18,0
AB-BT3090	30	90°	11	12,5	16,5	7,0	M12	43	23	18,0
AB-BT3545	35	45°	13	12,5	20,0	8,5	M12	48	28	22,5
AB-BT3560	35	60°	13	12,5	20,0	8,5	M12	48	28	22,5
AB-BT4045	40	45°	15	17,0	23,0	10,0	M16	60	35	28,0
AB-BT40451	40	45°	15	17,0	23,0	10,0	M16	57	32	25,0
AB-BT404518	40	45°	15	17,0	23,0	10,0	M16	54	32	25,0
AB-BT4060	40	60°	15	17,0	23,0	10,0	M16	60	35	28,0
AB-BT4090	40	90°	15	17,0	23,0	10,0	M16	60	35	28,0
AB-BT40901	40	90°	15	17,0	23,0	10,0	M16	57	32	25,0
AB-BT4545	45	45°	19	21,0	31,0	14,0	M20	70	40	31,0
AB-BT4560	45	60°	19	21,0	31,0	14,0	M20	70	40	31,0
AB-BT4590	45	90°	19	21,0	31,0	14,0	M20	70	40	31,0
AB-BT5045	50	45°	23	25,0	38,0	17,0	M24	85	45	35,0
AB-BT5060	50	60°	23	25,0	38,0	17,0	M24	85	45	35,0
AB-BT5090	50	90°	23	25,0	38,0	17,0	M24	85	45	35,0
AB-BT6045	60	45°	32	31,0	56,0	24,0	M30	115	65	53,0
AB-BT6060	60	60°	32	31,0	56,0	24,0	M30	115	65	53,0

Anzugsbolzen MAS BT

ähnlich ISO 7388-3 – JF mit O-Ring

ehemals MAS BT 403

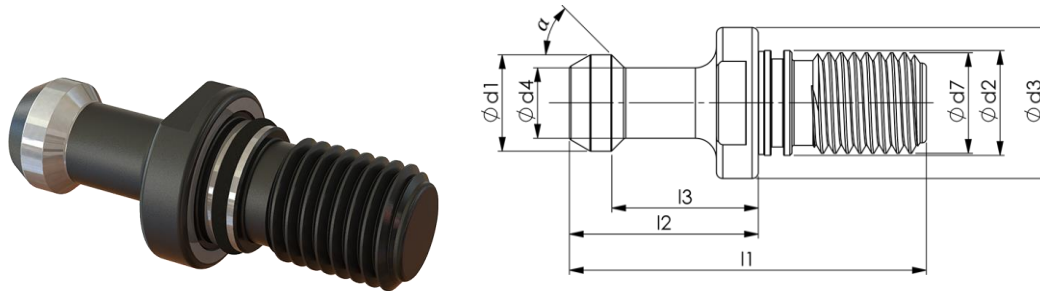


Artikel-Nr.	SK	α	d1	d2	d3	d4	d7	l1	l2	l3
AB-BT304510	30	45°	11	12,5	16,5	7	M12	43	23	18
AB-BT40453	40	45°	15	17,0	23,0	10	M16	60	32	25
AB-BT404510	40	45°	15	17,0	23,0	10	M16	60	35	28
AB-BT40601	40	60°	15	17,0	23,0	10	M16	57	32	25
AB-BT406010	40	60°	15	17,0	23,0	10	M16	60	35	28
AB-BT409010	40	90°	15	17,0	23,0	10	M16	60	35	28
AB-BT504510	50	45°	23	25,0	38,0	17	M24	85	45	35
AB-BT506010	50	60°	23	25,0	38,0	17	M24	85	45	35
AB-BT509010	50	90°	23	25,0	38,0	17	M24	85	45	35

Anzugsbolzen MAS BT

ISO 7388-3 - JD

ehemals MAS BT 403

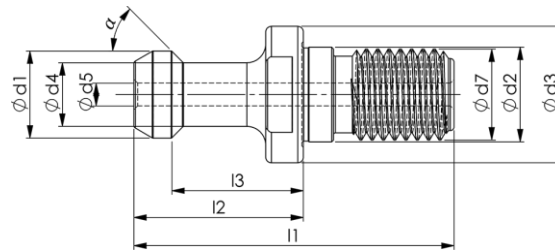


Artikel-Nr.	SK	α	d1	d2	d3	d4	d5	d7	l1	l2	l3
AB-BT30452	30	45°	11	12,5	16,5	7,0	2,5	M12	43	23	18
AB-BT30602	30	60°	11	12,5	16,5	7,0	2,5	M12	43	23	18
AB-BT30604	30	60°	11	12,5	16,5	7,5	2,5	M12	43	23	18
AB-BT404519	40	45°	15	17,0	23,0	10,0	4,0	M16	54	32	25

Anzugsbolzen MAS BT

ähnlich ISO 7388-3 - JD mit O-Ring

ehemals MAS BT 403

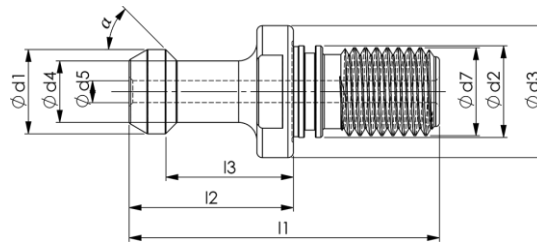


Artikel-Nr.	SK	α	d1	d2	d3	d4	d5	d7	l1	l2	l3
AB-BT30454	30	45°	11	12,5	16,5	7	2,3	M12	43	23	18
AB-BT30455	30	45°	11	12,5	16,5	8	4,0	M12	43	23	18
AB-BT304516	30	45°	11	12,5	16,5	7	2,5	M12	43	23	18
AB-BT30605	30	60°	11	12,5	16,5	7	2,5	M12	43	23	18
AB-BT404512	40	45°	15	17,0	23,0	10	4,5	M16	57	32	25
AB-BT404516	40	45°	15	17,0	23,0	10	4,0	M16	60	35	28
AB-BT404526	40	45°	15	17	23	10	4,0	M16	60	32	25
AB-BT404529	40	45°	15	17	23	10	4,5	M16	57	32	25
AB-BT406012	40	60°	15	17	23	10	4,5	M16	57	32	25
AB-BT406016	40	60°	15	17	23	10	4,0	M16	60	35	28
AB-BT409012	40	90°	15	17	23	10	4,5	M16	57	32	25
AB-BT409016	40	90°	15	17	23	10	4,0	M16	60	35	28
AB-BT504516	50	45°	23	25	38	17	8,5	M24	85	45	35
AB-BT506016	50	60°	23	25	38	17	8,5	M24	85	45	35
AB-BT509016	50	90°	23	25	38	17	8,5	M24	85	45	35
AB-T606016	60	60°	32	31	56	24	12,0	M30	115	65	53

Anzugsbolzen MAS BT

ähnlich ISO 7388-3 - JD mit O-Ring und Innendichtung

ehemals MAS BT 403

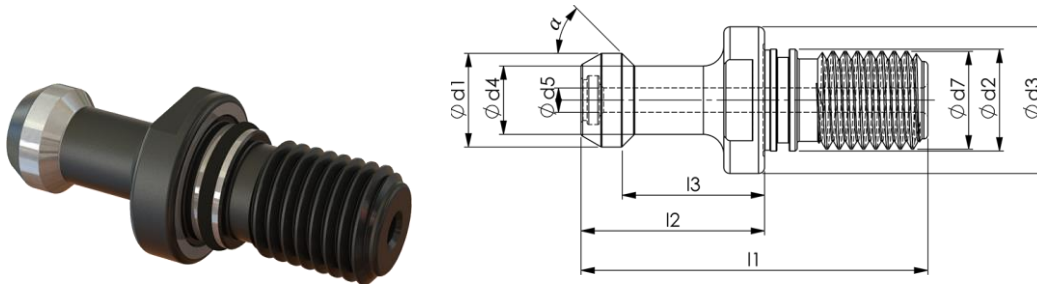

Artikel-Nr.	SK	α	d1	d2	d3	d4	d5	d7	l1	l2	l3
AB-BT30453	30	45°	11	12,5	16,5	7	2,5	M12	43,00	23,00	18,00
AB-BT404532	40	45°	15	17,0	23,0	10	3,0	M16	57,15	32,15	25,15
AB-BT504515	50	45°	23	25,0	38,0	17	6,0	M24	85,00	45,00	35,00
AB-BT504517	50	45°	23	25,0	38,0	17	5,5	M24	85,00	45,00	35,00
AB-BT509011	50	90°	23	25,0	38,0	17	8,0	M24	85,00	45,00	35,00